



primaklima

THE NEW WHISPERBLOWER

- 15 NEW FANS WITH PREMIUM EBM-PAPST MOTOR
- POWERFUL & VERY QUIET
- LIFETIME UP TO 12 YEARS

Discover the revolutionary design!

The innovative ventilation system:
More power at the lowest noise level.
Developed by primaklima & ebm-papst.



ebmpapst

engineering a better life



MADE IN
GERMANY

ASSEMBLED IN CZECH REPUBLIC




www.primaklima.com



The right model for every need.

ONE SPEED

PK125WHSP-L

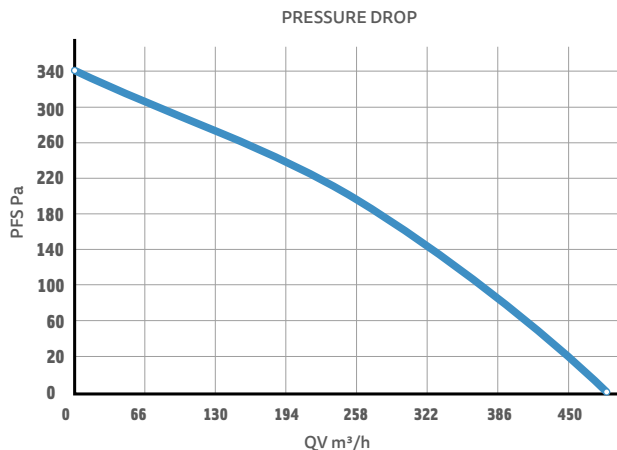


Flange: 125 mm
Max. Airflow: 480 m³/h
Power: 52 W
AC Input: 230 V, 50/60 Hz, 0.23 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.70 kg
(4.40 kg gross weight)

THREE SPEED

PK125WHSP-3

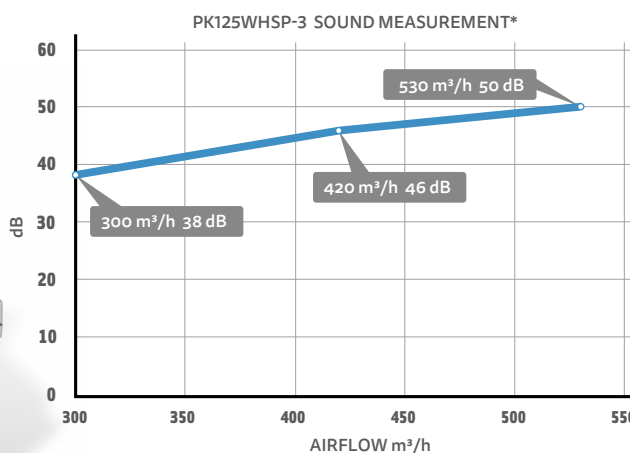

Flange: 125 mm
Max. Airflow: 530 m³/h
Power: 57 W
AC Input: 230 V, 50/60 Hz, 0.26 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.69 kg
(4.38 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)



primaklima

WHISPERBLOWER



TWO SPEED

PK125WHSP-2




GROWERS CHOICE
EFFICIENCY

UP TO
43%*
more Airflow


* compared to previous model
with same motor

primaklima

PK125WHSP2 - SOUND MEASUREMENT*

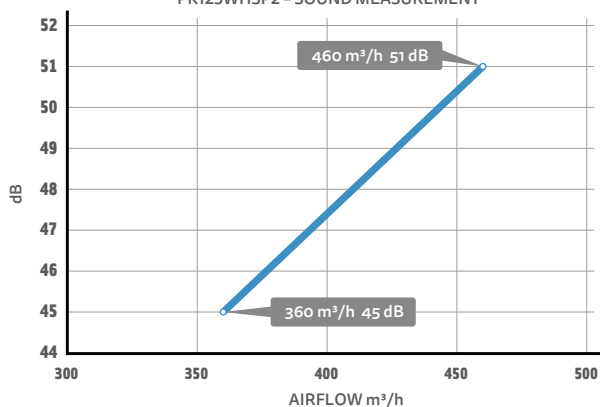

PRESSURE DROP

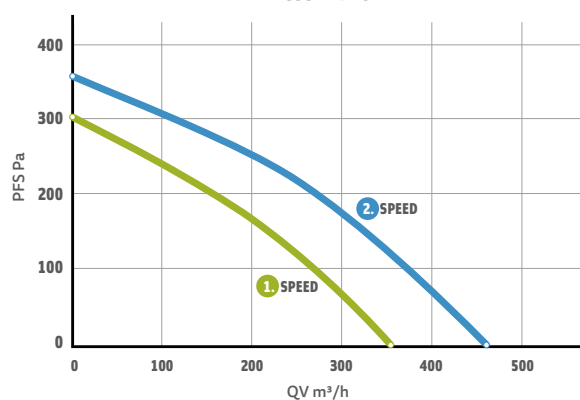

Flange: 125 mm
Max. Airflow: 460 m³/h
Power: 63 W
AC Input: 230 V, 50/60 Hz, 0.29 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.73 kg
(4.43 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)

Low Energyconsumption



A



High Energyconsumption



The right model for every need.

ECTHC REGULATES TEMPERATURE & HUMIDITY

PK125WHSPEC-THC



ECTC TEMPERATURE CONTROLLED

PK125WHSPECTC

EC SPEED CONTROLLED


PK125WHSP-EC

ECBLUE WITH RJ45 CONNECTOR


PK125WHSP-ECblue



SOUND MEASUREMENT

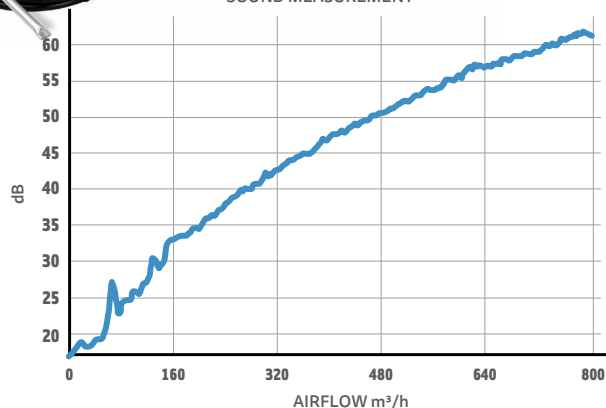


PRESSURE DROP

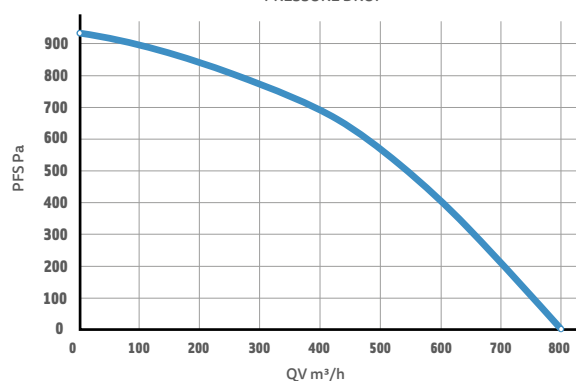

Flange: 125 mm
Max. Airflow: 800 m³/h
Power: 170 W
AC Input: 230 V, 50/60 Hz, 0.74 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.85 kg
(4.54 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)





primaklima WHISPERBLOWER

EC29
ECONOMICAL!
PK125WHSP-EC29



ESM
ECONOMICAL!
PK125WHSP-ESM



WARNING



The ESM version of the Whisperblower is optimized for extremely **low power consumption**. Due to this design, the motor emits **high-frequency beeps in the lower speed range**, which may not be suitable for you if you want a quiet fan.


GROWERS CHOICE
SAVE ENERGY

★ **450** m³/h ★
@ **29** WATT*


* measure result @ 240 Pa

primaklima

PRESSURE DROP

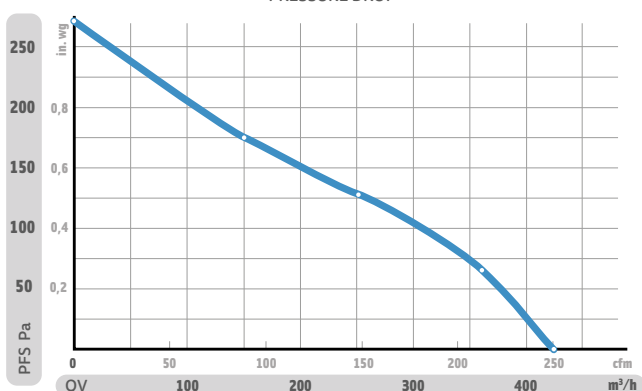

PK125WHSP-ESM - CONSUMPTION/ AIRFLOW

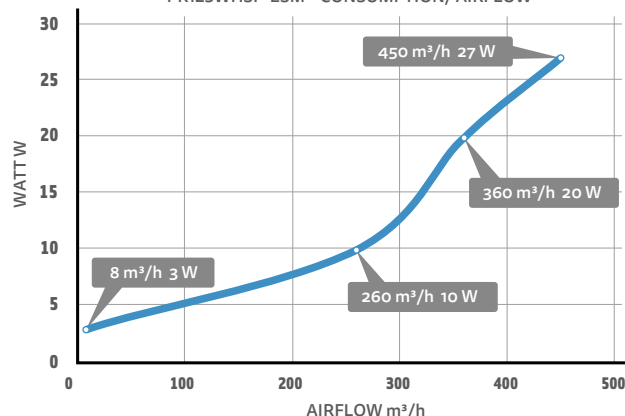

Flange: 125 mm
Max. Airflow: 450 m³/h
Power: 29 W
AC Input: 230 V, 50/60 Hz, 0.29 A

Tmax: 50°C
Dimensions: 315x309 mm (WxH)
Weight: 2.38 kg
(4.07 kg gross weight)


Low Energyconsumption



A



High Energyconsumption




The new 150/160 mm series models.

WHISPERBLOWER

ONE SPEED

PK150/160WHSP-A

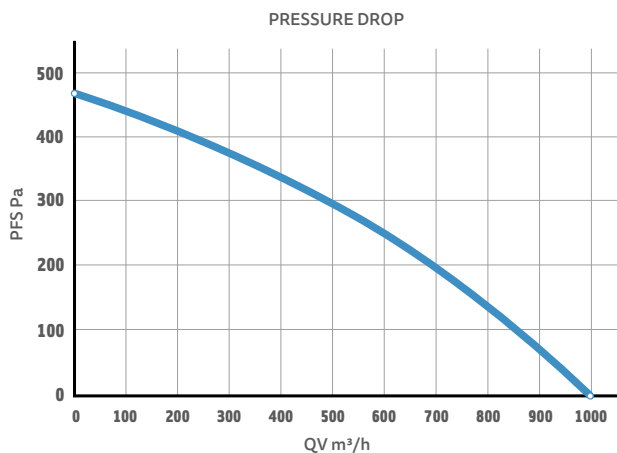


Double Flange: 150 / 160 mm
Max. Airflow: 1000 m³/h
Power: 124 W
AC Input: 230 V, 50/60 Hz, 0.55 A

Tmax: 50°C
Dimensions: 334x367 mm (WxH)
Weight: 3.95 kg
(5.60 kg gross weight)


ONE SPEED

PK150/160WHSP-L

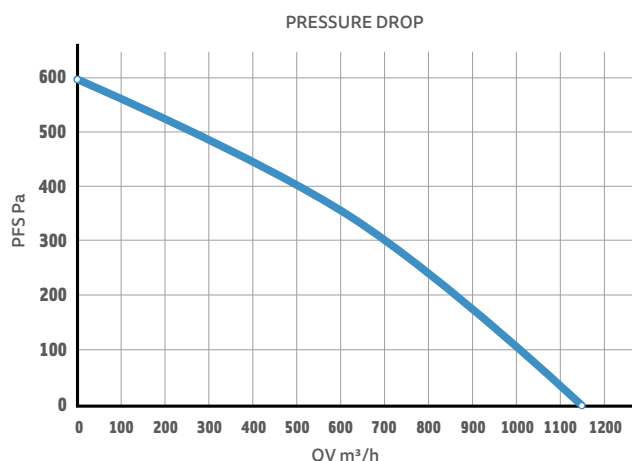

Double Flange: 150 / 160 mm
Max. Airflow: 1150 m³/h
Power: 155 W
AC Input: 230 V, 50/60 Hz, 0.68 A

Tmax: 50°C
Dimensions: 334x367 mm (WxH)
Weight: 3.95 kg
(6 kg gross weight)



primaklima

ECTHC REGULATES TEMPERATURE & HUMIDITY

PK150/160WHSPEC-THC



ECTC TEMPERATURE CONTROLLED

PK150/160WHSPECTC



EC SPEED CONTROLLED

PK150/160WHSPE-EC




ECBLUE WITH RJ45 CONNECTOR


PK150/160WHSPE-ECblue



SOUND MEASUREMENT

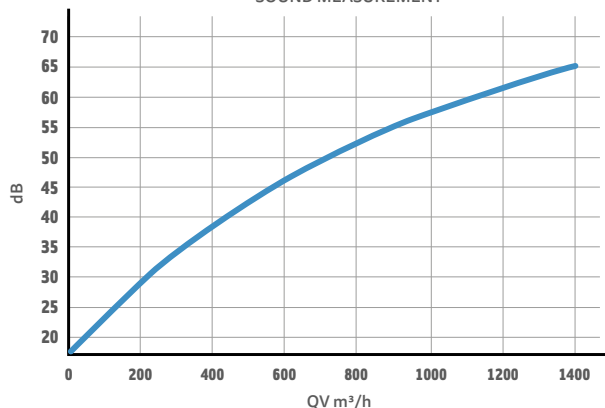


PRESSURE DROP

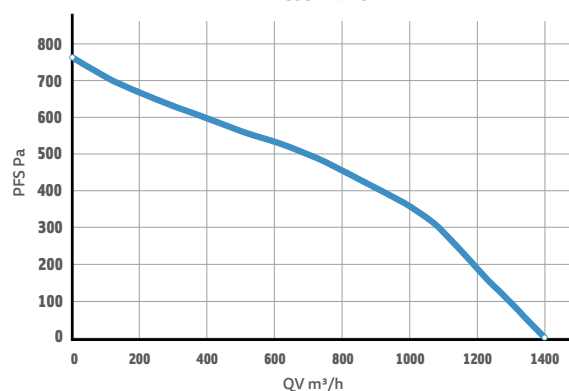

Double Flange: 150 / 160 mm
Max. Airflow: 1400 m³/h
Power: 170 W
AC Input: 230 V, 50/60 Hz, 1.4 A

Tmax: 50°C
Dimensions: 334x367 mm (WxH)
Weight: 3.85 kg
(5.50 kg gross weight)

* Sound pressure microphone 1 m to the side of the tube fan, measured in a tube open on both sides (length 1.5 m each)



Another offspring of the primaklima family.



12 VENTILATION-SETS

PKVS-100-L PKVS-100-TC PKVS-100EC-TC PKVS-100EC-THC PKVS-100-ECBLUE

PKVS-125-2 PKVS-125-EC29 PKVS-125-L PKVS-125-TC PKVS-125EC-TC PKVS-125EC-THC PKVS-125-ECBLUE

Combidec 2000

- Polyester and Aluminium
- 5 Layer Sandwich Construction
- Higher temperature and tear resistancy than normal PVC/Alu Ducting
- Made in Holland 

Solid Aluminium and Steel Filter


Made in Czech Republic 

Solid Housing

- Quality material: Nylon PA6_UL94
- Made in Germany 

CTC75 highly activated carbon

- 3 mm Pellets
- surface area of >1200 m²/g
- Low pressure drop
- Long service life and the best adsorption

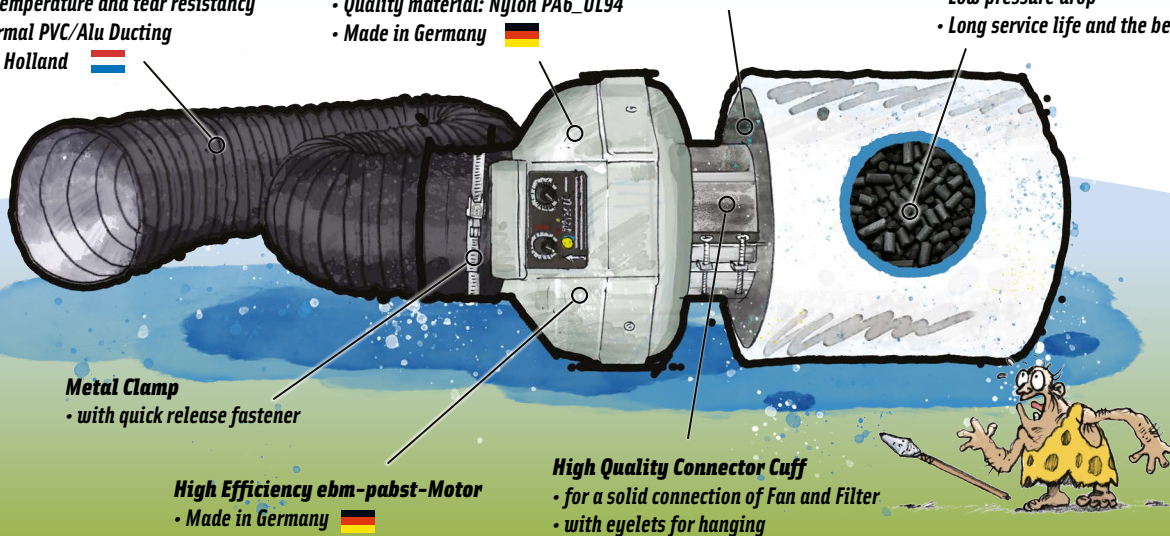

©PrimaKlima. Errors and omissions excepted. Illustrations similar. All rights reserved.

PRIMA KLIMA TRADING CZ, s.r.o.
Záměstí 594
338 28 Radnice
Czech Republic

Web
www.primaklima.com
[instagram.com/prima_klima](https://www.instagram.com/prima_klima)
[youtube.com/c/primaklima-horticulture](https://www.youtube.com/c/primaklima-horticulture)

E-Mail
sales@primaklima.com
Phone
+420 371 795 340